


ŻURAW WIEŻOWY PEINER SK 96


HYDROMASZ

USŁUGI DZWIOWE

DIN 15018 H1 / B3
BGL 2125 0090
Max. udźwig **6,0 t**

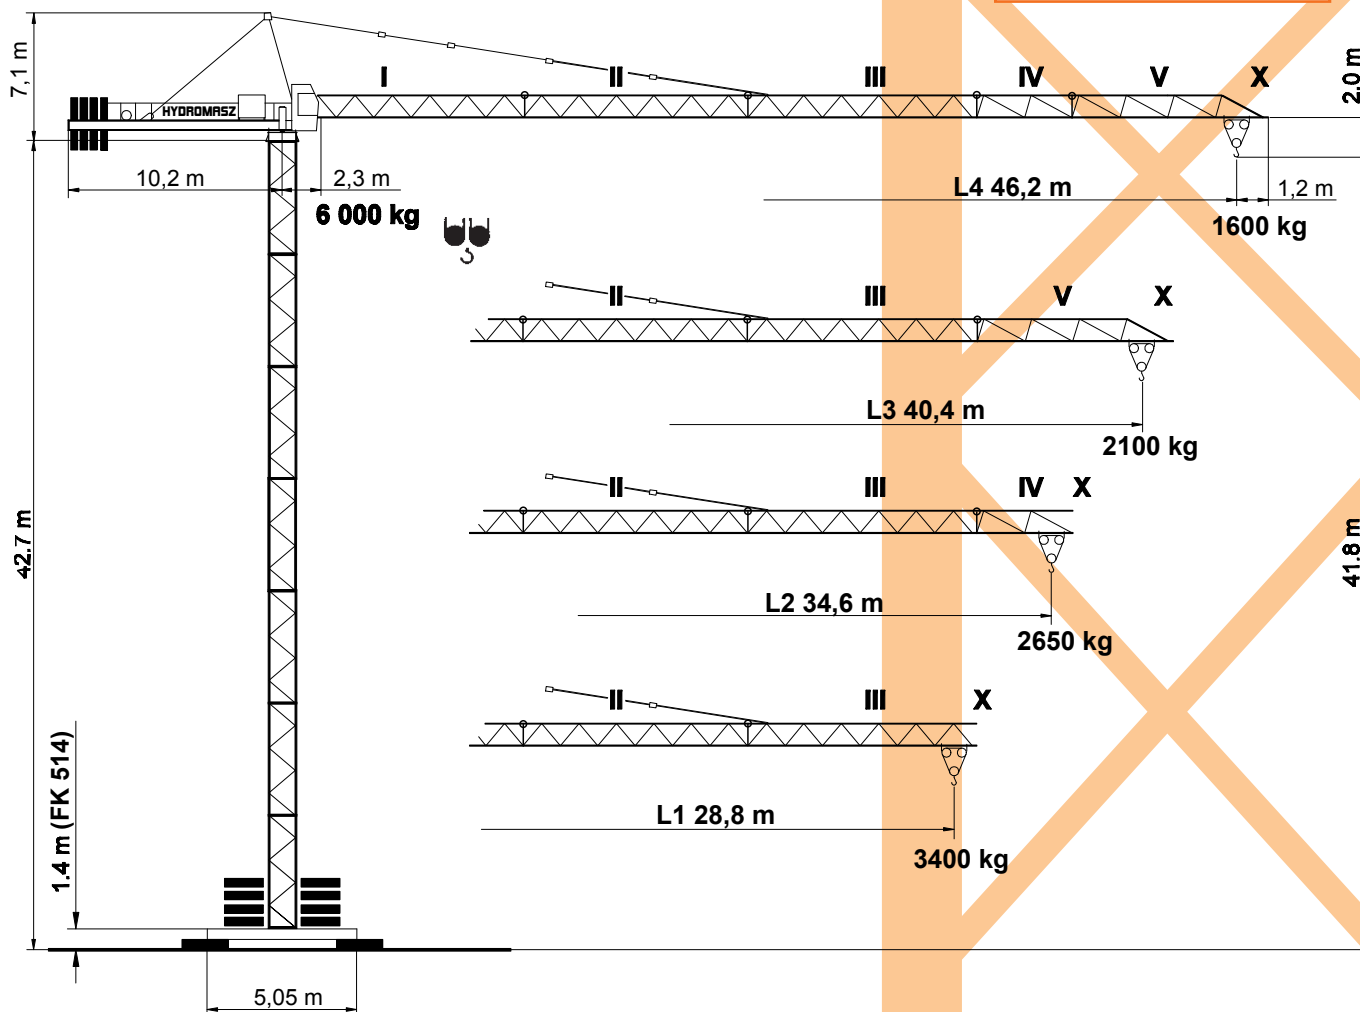

Wysięgnik m	Max. udźwig 6,0 t	Wysięg (m) / udźwig (t)															
		16,0	18,0	20,0	22,0	24,0	26,0	28,8	30,0	32,0	34,6	36,0	38,0	40,4	42,0	44,0	46,2
L4 46,2	2,3 - 15,0 m	5,57	4,88	4,33	3,88	3,51	3,20	2,84	2,71	2,51	2,28	2,18	2,04	1,88	1,80	1,70	1,60
L3 40,4	2,3 - 16,3 m	6,0	5,36	4,76	4,27	3,87	3,53	3,14	2,99	2,77	2,54	2,41	2,26	2,10			
L2 34,6	2,3 - 16,9 m	6,0	5,59	4,97	4,46	4,04	3,69	3,29	3,13	2,90	2,65						
L1 28,8	2,3 - 17,4 m	6,0	5,79	5,14	4,62	4,19	3,82	3,40									

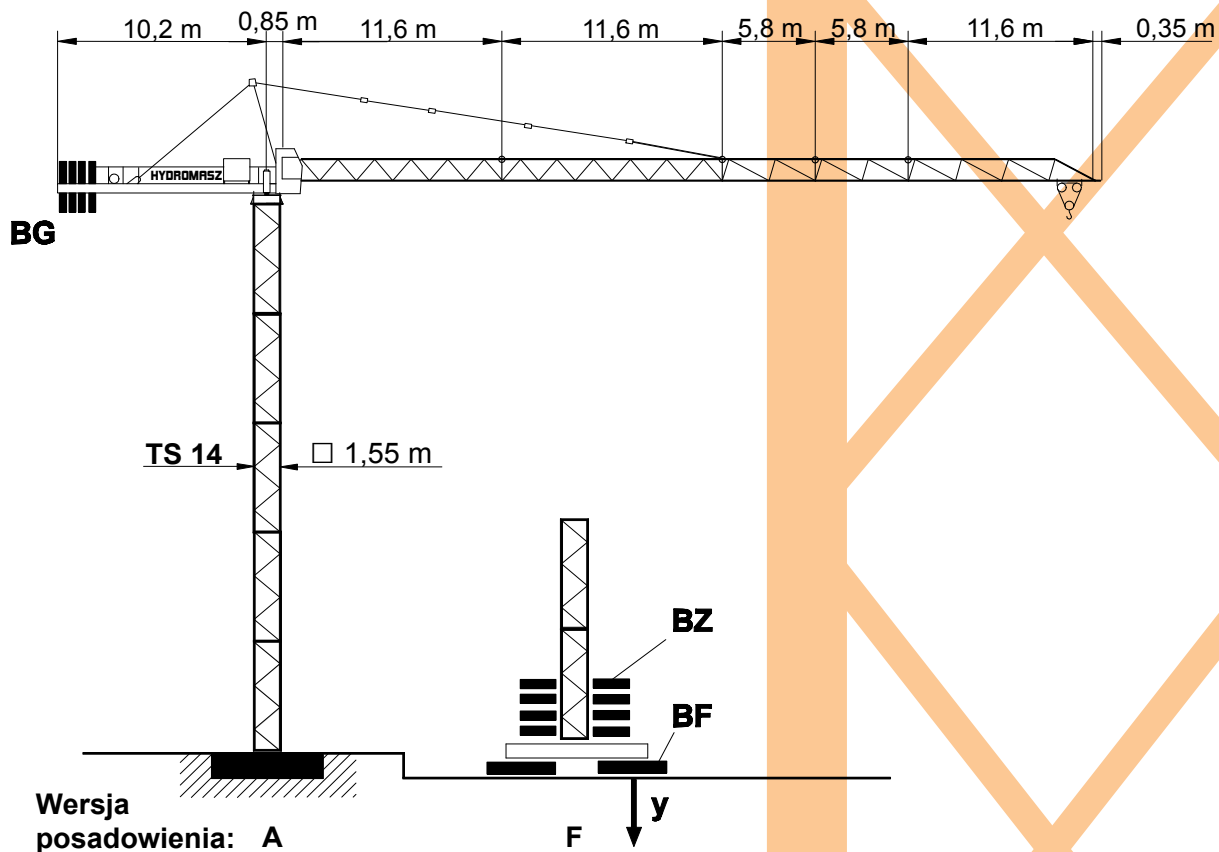

Wersja
posadowienia: A

Wersja A			Wersja F					
HK m	Wieża		HK m	Wieża		BZ + BF t	y	
	TS 14.1 5,9 m	TS 14.2 11,8 m		TS 14.1 5,9 m	TS 14.2 11,8 m		i.B. kN	a.B. kN
40,5	1 × TSV 14.1 6 × TS 14.1		41,8	1 × TSV 14.1 6 × TS 14.1		53,0	423	504
34,6	6 × TS 14.1	3 × TS 14.2	35,9	6 × TS 14.1	3 × TS 14.2	43,0	376	400
28,7	5 × TS 14.1		30,0	5 × TS 14.1		33,0	332	310
22,8	4 × TS 14.1	2 × TS 14.2	24,1	4 × TS 14.1	2 × TS 14.2	23,0	290	231
16,9	3 × TS 14.1		18,2	3 × TS 14.1		23,0	273	227
11,0	2 × TS 14.1	1 × TS 14.2	12,3	2 × TS 14.1	1 × TS 14.2	23,0	258	223
5,1	1 × TS 14.1		6,4	1 × TS 14.1		23,0	245	219
Płyta fundamentowa 6,5 × 6,5 × 1,2 m			Podstawa krzyżowa FK 514			BF 4 × 2,7 t BZ 5,0 t 6,1 t		

